

Encroachment Permit Conditions

- Construction Standard(s): _____
- General Conditions: _____
- Comprehensive General Liability insurance in amounts not less than \$1,000,000 combined single limit applying to bodily injury, personal injury and property damage are required.
- Additional Insured Endorsement: The local agency must be named as an additionally insured on a separate endorsement sheet that modifies the general liability policy.
- Contact local Police Department, Fire Department, and Parking Services prior to start of work.
- The Contractor shall maintain local access and provide emergency vehicle access at all times.
- Compaction test is required and shall be submitted to local Public Works Department.
- Provide a traffic control plan per the Manual on Uniform Traffic Control Devices (MUTCD).
- Provide safe pedestrian and wheelchair access, per ADA and State requirements, during construction.
- All work shall be performed between the hours of 8am and 6pm
- Please contact _____ prior to start of work and for final inspection.
- Planning review required: YES / NO
- Special Conditions: See attached and Storm Damage Repair North Street Steps Project plans and Specifications

Encroachment Permit Approval

Approved By: _____

Date: _____

Inspected By: _____

Date: _____

CITY OF SAUSALITO

STANDARD CONDITIONS FOR ENCROACHMENT PERMIT NO. _____

DESCRIPTION: _____

Condition Marked Apply to this Project

THIS ENCROACHMENT PERMIT IS GOOD FOR 6 MONTHS ___ ONE YEAR ___ 18 MONTHS ___ AS NOTED ON THE E.P. APPLICATION _____

1. This permit, or a complete copy, shall be kept at the work site at all times while work is being performed.
2. Notify Engineering Division staff at least 24 hours in advance of beginning work. _____ Engineer at (415) 289-4106 ext. 111 and/or _____ Sewer Systems Coordinator at (415) 289-4192.
3. Contractor is to comply with all requirement of Ordinance No. 1048 (Noise Ordinance) including limiting hours of work in residential areas between 8:00AM and 7:00PM, Monday through Friday, between 9:00AM and 5:00PM, Saturdays, ~~and between 9:00AM and 7:00PM, on City Holidays~~. No work is permitted on Sunday, except by owner occupant between 9:00AM and 7:00PM.
6pm
or City Holidays
4. Permittee shall comply with all Federal State and local laws regulation and statutes applicable to the work being performed under this permit. This also includes compliance with the requirements and permit conditions of the State of California Division of Industrial Safety.
5. The Permittee shall repair or replace at the discretion of the City Engineer, any and all public facilities damaged as a result of Permittee's actions in connection with this permit, and shall guarantee repairs or replacements to all work done under this permit, as deemed necessary by the City Engineer for a period of one year after completion of said work.
6. All traffic control shall be performed in accordance with the requirements of the current edition of Caltrans publication, "California Manual on Uniform Traffic Devices, Part 6- Temporary Traffic Control" including all specified advance construction signs and channelization devices. Construction warning signs and channelization devices are to be sufficient to adequately inform and protect vehicles, bicycle and pedestrian traffic. Permittee shall have available a copy of the Manual for workers at the construction site at all times during the progress of the work.
7. Where excavations have been permitted in paved streets, Permittee shall place temporary informational signs at each end of the work in addition to those signs required by the "California Manual on Uniform Traffic Devices, Part 6- Temporary Traffic Control." Such informational signs shall be a minimum of 18 x 24 inches, clearly identify the owner of the facility for which the work is being done, and shall show a telephone number of the owner where the public may obtain information relative to the work being done.
8. Traffic shall be permitted to pass through the work area at all times unless otherwise permitted in writing by the City Engineer. Any street closures shall be approved in advance by the City Engineer.
9. If the City Engineer determines that public convenience or safety is being jeopardized by Permittee's actions or inactions, the City Engineer may order the condition remedied by either verbal or written communication to the Permittee. If Permittee fails to remedy the condition within eight hours of such notice, the City Engineer may, at his or her discretion, either remedy the condition or contract to remedy the condition, and the cost thereof, including administrative expenses shall be charged to the Permittee.
10. If any work is performed in the location of an existing pedestrian path of travel, the Contractor shall restore the path of travel compliant with all ADA accessibility standards.
11. Any pavement marking and/or legends which are damaged or removed shall be replaced in kind by the Contractor at his/her expense. The repainting of any street markings or legends shall be performed using City stencils:
12. Wherever new work crosses any existing ~~City~~ utilities, the Contractor shall pothole the existing ~~City~~ utilities and determine their actual depth so as to avoid hitting these facilities during excavation.
13. All AC or PCC to be removed is to be sawcut at the edges.
14. All new AC street trench resurfacing is to be placed in maximum lifts of 3 inches and the final surface is to be fog sealed (unless a sand or slurry seal is called for on the plans).

CITY OF SAUSALITO

STANDARD CONDITIONS FOR ENCROACHMENT PERMIT NO. _____

- 15. All sections of curb, gutter and sidewalk to be replaced, shall have 12 inch long dowels (#4 reinforcing bars) inserted 6" into the existing concrete. A minimum of 2 dowels shall be placed into the curb and gutter. A minimum of 2 dowels shall be placed into sidewalk. Sidewalk dowel spacing shall be 24 inches on center.
- 16. Portions of existing sidewalk or curb and gutter to be removed shall be removed to the nearest expansion joint or sawcut at an existing score mark. Sawcuts must be at least 1-1/2 inches deep.
- 17. Concrete curbs, gutters and sidewalk shall consist of five sacks of cement per cubic yard with 3/8" maximum aggregate. ~~Two pounds of lampblack shall be added per cubic yard.~~ Slump shall not exceed 4 inches.
- 18. Special care shall be taken to match the existing finish, color, texture and score joining during replacement of the sidewalk.
- 19. Curb, gutter and sidewalk surfaces shall be broom finished unless otherwise approved by the City Engineer.
- 20. New sidewalk thickness shall be 4 inches minimum and driveway thickness shall be 6" minimum.
- 21. All excavations shall be backfilled and paved either temporarily or permanently at the end of each work day or covered with steel traffic plates held securely in place.
- 22. All backfill placement shall be approved by the City Engineer prior to permanent pavement replacement.
- 23. Tree roots shall not be cut or in any way damaged by Permittee.
- 24. Trench backfill shall be ~~either concrete slurry containing one sack of cement per cubic yard with 1/2 inch maximum aggregate size,~~ or Class 2 Aggregate Base compacted to 95% relative compaction as determined by California Test Method No. 216. All other trench details shall conform with Uniform Standard Drawing No. 330, 340 and 350 except as modified herein.
- 25. Permittee shall bear the entire cost of restoring the street or other property of the City, to the satisfaction of the City Engineer.
- 26. Excavated materials, equipment, construction materials or other debris shall not be stored or stockpiled on public streets other than North St.
- 27. The top six inches of subgrade shall be compacted to at least 95% relative Compaction in accordance with California Test Method No. 236 and shall be dampened before placing concrete.
- 28. Where unsuitable subgrade material is encountered, the City Engineer may require remedial work to be done, including, but not limited to, placing a layer of crushed rock under the concrete section.
- 29. Undercut subgrade for gutter or sidewalk shall be filled with Class 2 Aggregate Base.
- 30. Where trench excavation is longitudinal with the traffic lane and extends 100 feet or more, a 2" minimum thickness of asphalt concrete paving with pavement reinforcing fabric shall be placed across the entire width of the affected traffic lane upon completion of trench work. Existing surfacing shall be removed as necessary to maintain satisfactory cross slopes.
- 31. One-half inch thick expansion joints shall be placed on both sides of driveway approaches, curb and sidewalk return points and at 4 feet on center. Weakened plane joints in sidewalk shall be at least 1-1/2 inch deep and placed at 16 feet on center.
- 32. All work shall be performed in accordance with the codes and ordinances of the City of Sausalito and the Uniform Construction Standards, Specifications of the Cities of Marin and County of Marin.
- 33. The Contractor is to provide a Storm Water Pollution Prevention Plan to the City for review and approval. City Approval must be obtained prior to commencing any work.
- 34. Underground Service Alert (USA) shall be notified at tel. (800) 642-2444, no later than 48 hours prior to excavation near utilities.
- 35. No new utility boxes or poles will be permitted in the sidewalk area without the written approval of the City Engineer.

Special Conditions 2021-0000

- 1 The Encroachment Permit is only applicable to the public right of way; Contractor shall be responsible for ensuring that they have obtained permission from property owners prior to the use of their land.
- 2 No non-stormwater discharge shall enter the public storm drainage system or the Waters of The State. All Porta-Potties in the public Right of Way shall be equipped with a functional Secondary Containment Systems. The porta-potties shall be cleaned and maintained regularly throughout the project. The secondary containment shall be kept clear of trash, debris, and sewage. the secondary containment shall be properly cleaned or covered prior to any wet weather.
- 3 The public right of way shall be kept clean at all times. Spilled debris shall be cleaned promptly. No visible accumulation of sediment is permitted. No washing of sediment into drainage inlets is permitted. No materials associated with the work shall enter the waters of the State.
- 4 Prevent construction equipment/materials from entering stormdrains, sanitary sewers, ditches, creeks, or the bay.
- 5 Sweep streets and other paved areas daily. Never wash down streets or work areas with water.
- 6 Store any stockpiles of dirt, sand, asphalt, concrete, grout, or mortar under cover and away from drainage areas. These materials must never reach a storm drain, or other watercourse.
- 7 Contractor shall provide constant dust control.
- 8 Contractor shall save and protect existing monuments. Any damaged monuments shall be reestablished along with the filing of all required documents including but not limited to Corner Record with Marin County Department of Public Works. Refer to Business & Professions code section 8771.
- 9 Maintain access to adjacent driveways.
- 10 No parking signs shall be obtained from City of Sausalito Department of Public Works one week in advance. Vehicles shall be parked legally in the parking spaces. No parking signs shall be posted and verified by the County Dispatch 72 hours prior to becoming effective for enforcement. To verify the no parking signs, call County Dispatch 415-499-7234.
- 11 Project shall not increase emergency response time and shall allow emergency vehicles to pass without delay.
- 12 No sidewalk closure is permitted by this Encroachment Permit. No road closure is permitted by this Encroachment Permit.
- 13 The Equipment shall not block the gutter.
- 14 If a subcontractor is to be used to perform any part of the work, subcontractor shall name the City of Sausalito as an additionally insured on a separate endorsement sheet that modifies the general liability policy prior to start of work, a copy of which shall be provided to the City of Sausalito. The description in the certificate shall include the following language: "The City of Sausalito, its agents, officers, officials employees and volunteers as required by the permit are included as additionally insured."

POLLUTION PREVENTION

IT'S PART OF THE PLAN

MAKE SURE YOUR CREWS AND SUBS DO THE JOB RIGHT!

Runoff from streets and other paved areas is a major source of pollution in San Francisco Bay. Construction activities can directly affect the health of the Bay unless contractors and crews plan ahead to keep dirt, debris, and other construction waste away from storm drains and local creeks. Following these guidelines will ensure your compliance with local ordinance requirements. Contact your local stormwater coordinator (see reverse). Storm drain polluters may be liable for fines!

EARTHWORK & CONTAMINATED SOILS

- ▶ Avoid scheduling earth disturbing activities during the rainy season if possible. If grading activities during wet weather are allowed in your permit, be sure to implement all measures necessary to prevent erosion.
- ▶ Mature vegetation is the best form of erosion control. Minimize disturbance to existing vegetation whenever possible.
- ▶ If you disturb a slope during construction, prevent erosion by securing the soil with erosion control fabric, or seed with fast-growing grasses as soon as possible. Place a silt barrier downslope until soil is secure.
- ▶ Keep excavated soil on the site where it is least likely to collect in the street. Transfer to dump trucks should occur on the site, not in the street.
- ▶ Use sand bags, silt fences, hay bales, straw logs or other control measures to prevent the flow of silt off the site and into storm drains or creeks.

PAVING/ASPHALT WORK

- ▶ Do not pave during wet weather or when rain is forecast.
- ▶ Always cover storm drain inlets and manholes when paving or applying seal coat, tack coat, slurry seal, or fog seal.
- ▶ Do not sweep or wash down excess materials into storm drains, ditches or creeks. Collect these materials and return them to stockpiles, or dispose of as trash.
- ▶ Do not use water to wash down fresh asphalt or concrete pavement.

DEWATERING OPERATIONS

- ▶ Reuse water for dust control, irrigation, or another on-site purpose to the greatest extent possible.
- ▶ Be sure to call the local Stormwater Coordinator before discharging water to a street, storm drain, or creek. Filtration or diversion through a basin, tank, or sediment trap may be required.

MATERIALS STORAGE & WASTE DISPOSAL

- ▶ Sweep streets and other paved areas daily. Never wash down streets or work areas with water!
- ▶ Be sure to store any stockpiles of dirt, sand, asphalt, concrete, grout, or mortar under cover and away from drainage areas. These materials must never reach a storm drain, or other watercourse.
- ▶ Wash out concrete equipment trucks off-site, or designate an on-site area for washing where water will flow into a temporary pit in a dirt area. Let the water seep into the soil and dispose of hardened concrete with trash.
- ▶ Divert water from washing exposed aggregate concrete to a dirt area where it will not run into a gutter, street, or storm drain.
- ▶ If a suitable dirt area is not available, collect the wash water and remove it for appropriate disposal off site.

HAZARDOUS MATERIALS MANAGEMENT

- ▶ Label all hazardous materials/wastes (such as pesticides, paints, thinners, solvents, fuel, oil, and antifreeze) in accordance with city, state, and federal regulations.
- ▶ Store hazardous materials and wastes in secondary containment and cover them during wet weather.
- ▶ Follow manufacturer's application instructions for hazardous materials. Be careful not to use more than necessary.
- ▶ Do not apply chemicals outdoors when rain is forecast within 24 hours.
- ▶ Dispose of hazardous materials/waste at the Hazardous Waste Collection Facility. For more information:
Novato businesses call 892-6395
All other businesses in Marin call 485-5648

CONTINUED ON BACK

PAINTING

- ▶ Never rinse paint brushes or materials into a storm drain or on the street!
- ▶ Paint out excess water-based paint before rinsing brushes, rollers, or containers in a sink. If you can't use a sink, direct wash water to a dirt area, and spade it into the dirt with a shovel.
- ▶ Paint out excess oil-based paint before cleaning brushes in paint thinner.
- ▶ Filter paint thinners and solvents for reuse whenever possible. Dispose of oil-based paint sludge and unusable thinner at the hazardous waste collection facility. (See reverse for Hazardous Materials Management.)

LANDSCAPING

- ▶ Schedule grading and excavation projects for dry weather.
- ▶ Protect stockpiles and landscaping materials from wind and rain by storing them under tarps and secured plastic sheeting.
- ▶ Store pesticides, fertilizers, and other chemicals indoors or in a locked shed or storage cabinet.
- ▶ Make sure products are properly labeled and check inventory before buying additional products.
- ▶ Rinse containers and use rinse water as products before tossing out empty containers (5 gallons or less) in the trash.
- ▶ Get rid of unwanted products through the hazardous waste facility. (See reverse for Hazardous Materials Management.)
- ▶ Use temporary check dams or ditches to divert runoff away from storm drains.
- ▶ Protect storm drain inlets with berms, filter mats or other inlet protection measures.
- ▶ Revegetate the area. It's an excellent form of erosion control for any site.
- ▶ Collect lawn and garden clippings, pruning waste and tree trimmings. Chip, if necessary, and compost.
- ▶ Do not place yard waste in gutters. In communities with curbside yard waste recycling, leave clippings and pruning waste for pick-up in approved bags or containers or, take to a landfill that composts yard waste.
- ▶ Do not blow or rake leaves into the street.
- ▶ Call the County Stormwater Program at 499-6528 and ask for a copy of "Here's What To Do with the Water" or look in "other businesses" under www.mcstoppp.org

POOL/FOUNTAIN/SPA MAINTENANCE

- ▶ Never discharge pool or spa water (and/or backwash water) to a street or storm drain. Call the County at 499-6528 for a copy of "Here's What To Do with the Water" or look in "other businesses" under www.mcstoppp.org

VEHICLE & EQUIPMENT

MAINTENANCE

- ▶ Frequently, inspect vehicles and equipment for leaks. Use drip pans to catch leaks until repairs are made; repair leaks promptly.
- ▶ Fuel and maintain vehicles on site only in a bermed area or over a drip pan that is big enough to prevent runoff.
- ▶ If you must clean vehicles or equipment on site, clean with water only - and in a bermed area that will not allow rinsewater to run into streets, stormdrains, ditches, or creeks.
- ▶ Do not clean vehicles or equipment on site using soaps, solvents, degreasers, steam cleaning equipment, etc.

SAW CUTTING

- ▶ Always completely cover or barricade storm drain inlets when saw cutting. Use filter fabric, sand bags, or fine gravel dams to keep slurry out of the storm drain system. If saw-cut slurry enters a stormdrain, clean up immediately.
- ▶ Shovel, absorb, or vacuum saw-cut slurry and pick up all waste as soon as you are finished in one location and by the end of each work day.

STORMWATER COORDINATORS (During Normal Business Hours)

Town of San Anselmo
Rabi Elias/Dave Craig
258-4616

City of Sausalito
Todd Teachout
289-4111

Town of Corte Madera
Kevin Kramer
927-5057

City of San Rafael
Richard Landis
485-3355

City of Belvedere
Scott Derdenger
435-3838

County of Marin
Howard Bunce
499-3748

Town of Ross
Rob Maccario
453-8287 ext. 163

Town of Tiburon
Matt Swalberg
435-7354

Town of Fairfax
Kathy Wilkie
453-0291

City of Larkspur
Mike Myers
927-5017

City of Novato
Dave Harlan
899-8246

City of Mill Valley
Jill Barnes
388-4033 ext. 116

To report illegal discharges to local waterways occurring after normal business hours, call 911; or, the County Sheriff's non-emergency line at 499-7233.

To report oil and chemical spills occurring in "open waters" or "on land" call 1-800-OILS911.

To report fish kills or poaching, call the California Department of Fish and Game at 1-888-334-2258.



CITY OF SAUSALITO

Department of Public Works
420 Litho Street • Sausalito, California 94965
Telephone: (415) 289-4106
Fax: (415) 339-2256
www.sausalito.gov

May 4, 2020

TO: All Those Issued Permits and Permit Extensions or Revisions on or After May 4, 2020: Acknowledgement of Safety Protocols

The Marin County Health Officer along with the other six Bay Area health officials released a revised Shelter in Place Order on Wednesday, April 29. Effective on Monday, May 4, construction activity is allowed to recommence provided that the requirements set forth in Appendix B to the Order are met. Failure to comply with any of the provisions of the Order constitutes an imminent threat and menace to public health, constitutes a public nuisance, and is punishable by fine, imprisonment, or both. In addition, if you do not comply with the applicable requirements set forth in Appendix B to the Order you will receive a Stop Work Order.

By starting work on or after May 4th, you are acknowledging that you, all of the tradespeople working on the job site, and the property owner have reviewed and will abide by the Order and the protocols as set forth in Appendix B1 or B2 to the Order for the duration of, or any additional extensions of this order. Failure to do so may result in future stoppage of work. You are required to sign and return an acknowledgement form prior to issuance of your permit.

These protocols include, but are not limited to: designating an on-site COVID-19 supervisor to enforce the protocols, establishing a daily screening protocol, staggering trades, ensuring appropriate handwashing facilities, restricting carpooling, maintaining a daily attendance log and posting a notice regarding job site protocols (please note that these are a very limited list of the protocols in Appendix B1 and B2; you are required to read and abide by all of the protocols in Appendix B1 and B2, as it applies to your project).

As the order restricts carpooling, and thus workers must typically arrive in separate vehicles, you must take all measures to reduce parking and congestion impacts on neighborhoods, including utilizing all on-site parking that is available, staggering trades and staging the work in phases and utilizing City parking lots for residents vehicles and tradespeople's vehicles and requiring tradespeople to bike or walk to the job site. If you are interested in utilizing City parking lots to store resident or tradespeople's vehicles please coordinate with Lieutenant Stacie Gregory (sgregory@sausalito.gov) to secure the appropriate permits.

If there are substantial impacts to the neighborhood due to parking congestion you will be required to provide a construction management parking plan which demonstrates how you are staging the work and coordinating vehicle parking at the job site.

Please note that while we understand that you are eager to work, no construction activity on your project can start until you have an issued permit and until you have taken the necessary steps to comply with the Construction Protocols. Here is a link to the Construction Protocols that you are required to comply with: <https://coronavirus.marinhhs.org/appendix-b-1-marine-health-order-april-29-2020>.

Inspections will be provided as necessary with protocols to ensure health and safety practices are followed. The Division has launched a virtual inspection process for smaller improvements and will determine if an inspection request qualifies for this new type of inspection. All other inspections will be onsite inspections and performed on Monday through Friday for the Sewer Division, and on Wednesdays for the Engineering Division. Every attempt will be made to perform inspections on the date requested; however, inspection requests will be processed on a first come, first serve basis. If an inspection request needs to be altered due to compliance with safety protocols, inspector's schedule, or time constraints a phone call or email will be returned to the contact person.

To schedule an inspection of sewer lateral repairs or replacement Monday through Friday, you must send an email to: pguasco@sausalito.gov and mlockett@sausalito.gov. Please include the project address and the City of Sausalito plumbing permit number in the subject line of the email correspondence. Please allow for the request to be submitted a minimum of 72 hours in advance. You will receive confirmation of the inspection request via an Outlook calendared inspection request. You must acknowledge the Outlook calendared inspection invitation as either, "accept" or "decline" in order to receive a response from this department.

To schedule an inspection from the Engineering Division on Wednesdays or to see if your inspection qualifies for a virtual inspection Monday through Friday, please send an email to: engineering@sausalito.gov and include the project address, permit number, and type of inspection requested.

A responsible party shall be on site during the inspection and have the following paperwork on site:

- City approved permit and plan set
- Any additional documents issued with the permit
- The job card issued with the building permit

Note that as all documents are being issued electronically, you must print out approved permit, plan sets, and any additional documents issued with the permit and have them on the job site at all times.

Attachment: Project Safety Protocol Acknowledgement



City of Sausalito
420 Litho Street
Sausalito, CA 94965
www.sausalito.gov
415-289-4106

New Marin County Construction Requirements Acknowledgement Form

On April 29, 2020 the Marin County Health Officer updated its shelter-in-place order. Effective May 4, 2020, construction activities are allowed provided such activities comply with specific Project Safety Protocols.

Attached below are the specific requirements, titled Appendix B-1 Small Construction Project Safety Protocol which are applicable to most construction projects within the City of Sausalito, as well as Appendix B-2 Large Construction Project Safety Protocol. Additionally, please find attached sample documents prepared by the City intended to help facilitate compliance with new job site requirements.

Please read this document carefully. These are not recommendations. These are requirements for the job site. Violation of or failure to comply is a misdemeanor punishable by fine, imprisonment, or both.

I acknowledge that I have read, understand, and will comply with all requirements of the Marin County Shelter in Place Order – Appendix B1. I understand that violation of or failure to comply with the Order is a misdemeanor punishable by fine, imprisonment, or both. (California Health and Safety Code § 120295, *et seq.*; Cal. Penal Code §§ 69, 148(a)(1), *et seq.*)

Print/Type Name

Signature


Date

Contractor Company

CSLB License #

Permit Number

Job Site Address



Appendix B-1

Marin Health Order for April 29, 2020

Appendix B-1


Small Construction Project Safety Protocol

1. Any construction project meeting any of the following specifications is subject to this Small Construction Project Safety Protocol ("SCP Protocol"), including public works projects unless otherwise specified by the Health Officer:
 - a. For residential projects, any single-family, multi-family, senior, student, or other residential construction, renovation, or remodel project consisting of 10 units or less. This SCP Protocol does not apply to construction projects where a person is performing construction on their current residence either alone or solely with members of their own household.
 - b. For commercial projects, any construction, renovation, or tenant improvement project consisting of 20,000 square feet of floor area or less.
 - c. For mixed-use projects, any project that meets both of the specifications in subsection 1.a and 1.b.
 - d. All other construction projects not subject to the Large Construction Project Safety Protocol set forth in Appendix B-2.
2. The following restrictions and requirements must be in place at all construction job sites subject to this SCP Protocol:
 - a. Comply with all applicable and current laws and regulations including but not limited to OSHA and Cal-OSHA. If there is any conflict, difference, or discrepancy between or among applicable laws and regulations and/or this SCP Protocol, the stricter standard shall apply.
 - b. Designate a site-specific COVID-19 supervisor or supervisors to enforce this guidance. A designated COVID-19 supervisor must be present on the construction site at all times during construction activities. A COVID-19 supervisor may be an on-site worker who is designated to serve in this role.
 - c. The COVID-19 supervisor must review this SCP Protocol with all workers and visitors to the construction site.
 - d. Establish a daily screening protocol for arriving staff to ensure that potentially infected staff do not enter the construction site. If workers leave the jobsite and return the same day, establish a cleaning and decontamination protocol prior to entry and exit of the jobsite.

Post the daily screening protocol at all entrances and exits to the jobsite. More information on screening can be found online at: <https://www.cdc.gov/coronavirus/2019-ncov/community/index.html>

- e. Practice social distancing by maintaining a minimum six-foot distance between workers at all times, except as strictly necessary to carry out a task associated with the construction project.
- f. Where construction work occurs within an occupied residential unit, separate work areas must be sealed off from the remainder of the unit with physical barriers such as plastic sheeting or closed doors sealed with tape to the extent feasible. If possible, workers must access the work area from an alternative entry/exit door to the entry/exit door used by residents. Available windows and exhaust fans must be used to ventilate the work area. If residents have access to the work area between workdays, the work area must be cleaned and sanitized at the beginning and at the end of workdays. Every effort must be taken to minimize contact between workers and residents, including maintaining a minimum of six feet of social distancing at all times.
- g. Where construction work occurs within common areas of an occupied residential or commercial building or a mixed-use building in use by on-site employees or residents, separate work areas must be sealed off from the rest of the common areas with physical barriers such as plastic sheeting or closed doors sealed with tape to the extent feasible. If possible, workers must access the work area from an alternative building entry/exit door to the building entry/exit door used by residents or other users of the building. Every effort must be taken to minimize contact between worker and building residents and users, including maintaining a minimum of six feet of social distancing at all times.
- h. Prohibit gatherings of any size on the jobsite, including gatherings for breaks or eating, except for meetings regarding compliance with this protocol or as strictly necessary to carry out a task associated with the construction project.
- i. Cal-OSHA requires employers to provide water, which should be provided in single-serve containers. Sharing of any of any food or beverage is strictly prohibited and if sharing is observed, the worker must be sent home for the day.
- j. Provide personal protective equipment (PPE) specifically for use in construction, including gloves, goggles, face shields, and face coverings as appropriate for the activity being performed. At no time may a contractor secure or use medical-grade PPE unless required due to the medical nature of a jobsite. Face coverings must be worn in compliance with the Health Officer Order Generally Requiring Members of the Public and Workers to Wear Face Coverings, dated April 17, 2020, or any subsequently issued or amended order.
- k. Strictly control "choke points" and "high-risk areas" where workers are unable to maintain six-foot social distancing and prohibit or limit use to ensure that six-foot distance can easily be maintained between individuals.
- l. Minimize interactions and maintain social distancing with all site visitors, including delivery workers, design professional and other project consultants, government agency representatives, including building and fire inspectors, and residents at residential construction sites.
- m. Stagger trades as necessary to reduce density and allow for easy maintenance of minimum six-foot separation.

- n. Discourage workers from using others' desks, work tools, and equipment. If more than one worker uses these items, the items must be cleaned and disinfected with disinfectants that are effective against COVID-19 in between use by each new worker. Prohibit sharing of PPE.
- o. If hand washing facilities are not available at the jobsite, place portable wash stations or hand sanitizers that are effective against COVID-19 at entrances to the jobsite and in multiple locations dispersed throughout the jobsite as warranted.
- p. Clean and sanitize any hand washing facilities, portable wash stations, jobsite restroom areas, or other enclosed spaces daily with disinfectants that are effective against COVID-19. Frequently clean and disinfect all high touch areas, including entry and exit areas, high traffic areas, rest rooms, hand washing areas, high touch surfaces, tools, and equipment.
- q. Maintain a daily attendance log of all workers and visitors that includes contact information, including name, phone number, address, and email.
- r. Post a notice in an area visible to all workers and visitors instructing workers and visitors to do the following:
- i. Do not touch your face with unwashed hands or with gloves.
 - ii. Frequently wash your hands with soap and water for at least 20 seconds or use hand sanitizer with at least 60% alcohol.
 - iii. Clean and disinfect frequently touched objects and surfaces such as work stations, keyboards, telephones, handrails, machines, shared tools, elevator control buttons, and doorknobs.
 - iv. Cover your mouth and nose when coughing or sneezing, or cough or sneeze into the crook of your arm at your elbow/sleeve.
 - v. Do not enter the jobsite if you have a fever, cough, or other COVID-19 symptoms. If you feel sick, or have been exposed to anyone who is sick, stay at home.
 - vi. Constantly observe your work distances in relation to other staff. Maintain the recommended minimum six feet at all times when not wearing the necessary PPE for working in close proximity to another person.
 - vii. Do not carpool to and from the jobsite with anyone except members of your own household unit, or as necessary for workers who have no alternative means of transportation.
 - viii. Do not share phones or PPE.



Select Language

Appendix B-2 for Marin Health Order for April 29, 2020

Appendix B-2

Large Construction Project Safety Protocol

1. Any construction project meeting any of the following specifications is subject to this Large Construction Project Safety Protocol ("LCP Protocol"), including public works projects unless otherwise specified by the Health Officer:
 - a. For residential construction projects, any single-family, multi-family, senior, student, or other residential construction, renovation, or remodel project consisting of more than 10 units.
 - b. For commercial construction projects, any construction, renovation, or tenant improvement project consisting of more than 20,000 square feet of floor area.
 - c. For construction of Essential Infrastructure, as defined in section 16.c of the Order, any project that requires five or more workers at the jobsite at any one time.
2. The following restrictions and requirements must be in place at all construction job sites subject to this LCP Protocol:
 - a. Comply with all applicable and current laws and regulations including but not limited to OSHA and Cal-OSHA. If there is any conflict, difference or discrepancy between or among applicable laws and regulations and/or this LCP Protocol, the stricter standard will apply.
 - b. Prepare a new or updated Site-Specific Health and Safety Plan to address COVID-19-related issues, post the Plan on-site at all entrances and exits, and produce a copy of the Plan to County governmental authorities upon request. The Plan must be translated as necessary to ensure that all non-English speaking workers are able to understand the Plan.
 - c. Provide personal protective equipment (PPE) specifically for use in construction, including gloves, goggles, face shields, and face coverings as appropriate for the activity being performed. At no time may a contractor secure or use medical-grade PPE, unless required due to the medical nature of a job site. Face coverings must be worn in compliance with the Health Officer Order Generally Requiring Members of the Public and Workers to Wear Face Coverings, dated April 17, 2020, or any subsequently issued or amended order.
 - d. Ensure that employees are trained in the use of PPE. Maintain and make available a log of all PPE training provided to employees and monitor all employees to ensure proper use of the PPE.
 - e. Prohibit sharing of PPE.
 - f. Implement social distancing requirements including, at minimum:

- i. Stagger stop- and start-times for shift schedules to reduce the quantity of workers at the jobsite at any one time to the extent feasible.
- ii. Stagger trade-specific work to minimize the quantity of workers at the jobsite at any one time.
- iii. Require social distancing by maintaining a minimum six-foot distance between workers at all times, except as strictly necessary to carry out a task associated with the project.
- iv. Prohibit gatherings of any size on the jobsite, except for safety meetings or as strictly necessary to carry out a task associated with the project.
- v. Strictly control “choke points” and “high-risk areas” where workers are unable to maintain minimum six-foot social distancing and prohibit or limit use to ensure that minimum six-foot distancing can easily be maintained between workers.
- vi. Minimize interactions and maintain social distancing with all site visitors, including delivery workers, design professional and other project consultants, government agency representatives, including building and fire inspectors, and residents at residential construction sites.
- vii. Prohibit workers from using others’ phones or desks. Any work tools or equipment that must be used by more than one worker must be cleaned with disinfectants that are effective against COVID-19 before use by a new worker.
- viii. Place wash stations or hand sanitizers that are effective against COVID-19 at entrances to the jobsite and in multiple locations dispersed throughout the jobsite as warranted.
- ix. Maintain a daily attendance log of all workers and visitors that includes contact information, including name, address, phone number, and email.
- x. Post a notice in an area visible to all workers and visitors instructing workers and visitors to do the following:
 1. Do not touch your face with unwashed hands or with gloves.
 2. Frequently wash your hands with soap and water for at least 20 seconds or use hand sanitizer with at least 60% alcohol.
 3. Clean and disinfect frequently touched objects and surfaces such as workstations, keyboards, telephones, handrails, machines, shared tools, elevator control buttons, and doorknobs.
 4. Cover your mouth and nose when coughing or sneezing or cough or sneeze into the crook of your arm at your elbow/sleeve.
 5. Do not enter the jobsite if you have a fever, cough, or other COVID-19 symptoms. If you feel sick, or have been exposed to anyone who is sick, stay at home.
 6. Constantly observe your work distances in relation to other staff. Maintain the recommended minimum six-feet distancing at all times when not wearing the necessary PPE for working in close proximity to another person.
 7. Do not share phones or PPE.

- xi. The notice in section 2.f.x must be translated as necessary to ensure that all non-English speaking workers are able to understand the notice.
- g. Implement cleaning and sanitization practices in accordance with the following:
- i. Frequently clean and sanitize, in accordance with CDC guidelines, all high-traffic and high-touch areas including, at a minimum: meeting areas, jobsite lunch and break areas, entrances and exits to the jobsite, jobsite trailers, hand-washing areas, tools, equipment, jobsite restroom areas, stairs, elevators, and lifts.
 - ii. Establish a cleaning and decontamination protocol prior to entry and exit of the jobsite and post the protocol at entrances and exits of jobsite.
 - iii. Supply all personnel performing cleaning and sanitization with proper PPE to prevent them from contracting COVID-19. Employees must not share PPE.
 - iv. Establish adequate time in the workday to allow for proper cleaning and decontamination including prior to starting at or leaving the jobsite for the day.
- h. Implement a COVID-19 community spread reduction plan as part of the Site-Specific Health and Safety Plan that includes, at minimum, the following restrictions and requirements:
- i. Prohibit all carpooling to and from the jobsite except by workers living within the same household unit, or as necessary for workers who have no alternative means of transportation.
 - ii. Cal-OSHA requires employers to provide water, which should be provided in single-serve containers. Prohibit any sharing of any food or beverage and if sharing is observed, the worker must be sent home for the day.
 - iii. Prohibit use of microwaves, water coolers, and other similar shared equipment.
- i. Assign a COVID-19 Safety Compliance Officer (SCO) to the jobsite and ensure the SCO's name is posted on the Site-Specific Health and Safety Plan. The SCO must:
- i. Ensure implementation of all recommended safety and sanitation requirements regarding the COVID-19 virus at the jobsite.
 - ii. Compile daily written verification that each jobsite is compliant with the components of this LCP Protocol. Each written verification form must be copied, stored, and made immediately available upon request by any County official.
 - iii. Establish a daily screening protocol for arriving staff, to ensure that potentially infected staff do not enter the construction site. If workers leave the jobsite and return the same day, establish a cleaning and decontamination protocol prior to entry and exit of the jobsite. Post the daily screening protocol at all entrances and exit to the jobsite. More information on screening can be found online at: <https://www.cdc.gov/coronavirus/2019-ncov/community/index.html> (<https://www.cdc.gov/coronavirus/2019-ncov/community/index.html>).
 - iv. Conduct daily briefings in person or by teleconference that must cover the following topics:
 - 1. New jobsite rules and pre-job site travel restrictions for the prevention of COVID-19 community spread.

2. Review of sanitation and hygiene procedures.
 3. Solicitation of worker feedback on improving safety and sanitation.
 4. Coordination of construction site daily cleaning/sanitation requirements.
 5. Conveying updated information regarding COVID-19.
 6. Emergency protocols in the event of an exposure or suspected exposure to COVID-19.
- v. Develop and ensure implementation of a remediation plan to address any non-compliance with this LCP Protocol and post remediation plan at entrance and exit of jobsite during remediation period. The remediation plan must be translated as necessary to ensure that all non-English speaking workers are able to understand the document.
 - vi. The SCO must not permit any construction activity to continue without bringing such activity into compliance with these requirements.
 - vii. Report repeated non-compliance with this LCP Protocol to the appropriate jobsite supervisors and a designated County official.
- j. Assign a COVID-19 Third-Party Jobsite Safety Accountability Supervisor (JSAS) for the jobsite, who at a minimum holds an OSHA-30 certificate and first-aid training within the past two years, who must be trained in the protocols herein and verify compliance, including by visual inspection and random interviews with workers, with this LCP Protocol.
 - i. Within seven calendar days of each jobsite visit, the JSAS must complete a written assessment identifying any failure to comply with this LCP Protocol. The written assessment must be copied, stored, and, upon request by the County, sent to a designated County official.
 - ii. If the JSAS discovers that a jobsite is not in compliance with this LCP Protocol, the JSAS must work with the SCO to develop and implement a remediation plan.
 - iii. The JSAS must coordinate with the SCO to prohibit continuation of any work activity not in compliance with rules stated herein until addressed and the continuing work is compliant.
 - iv. The remediation plan must be sent to a designated County official within five calendar days of the JSAS's discovery of the failure to comply.
 - k. In the event of a confirmed case of COVID-19 at any jobsite, the following must take place:
 - i. Immediately remove the infected individual from the jobsite with directions to seek medical care.
 - ii. Each location the infected worker was at must be decontaminated and sanitized by an outside vendor certified in hazmat clean ups, and work in these locations must cease until decontamination and sanitization is complete.
 - iii. The County Public Health Department must be notified immediately and any additional requirements per the County health officials must be completed, including full compliance with any tracing efforts by the County.
 - l. Where construction work occurs within an occupied residential unit, any separate work area must be sealed off from the remainder of the unit with physical barriers such as plastic sheeting

or closed doors sealed with tape to the extent feasible. If possible, workers must access the work area from an alternative entry/exit door to the entry/exit door used by residents. Available windows and exhaust fans must be used to ventilate the work area. If residents have access to the work area between workdays, the work area must be cleaned and sanitized at the beginning and at the end of workdays. Every effort must be taken to minimize contact between workers and residents, including maintaining a minimum of six feet of social distancing at all times.


- m. Where construction work occurs within common areas of an occupied residential or commercial building or a mixed-use building in use by on-site employees or residents, any separate work area must be sealed off from the rest of the common areas with physical barriers such as plastic sheeting or closed doors sealed with tape to the extent feasible. If possible, workers must access the work area from an alternative building entry/exit door to the building entry/exit door used by residents or other users of the building. Every effort must be taken to minimize contact between worker and building residents and users, including maintaining a minimum of six feet of social distancing at all times.

If you are a person with a disability and require an accommodation to participate in a County program, service, or activity, requests may be made by calling (415) 473-4381 (Voice), (415) 473-3232 (TDD/TTY), or by email ([https://www.marincounty.org/Global/Contact-Us-Form?id="+kWKcCF02aMlhbuNecpG4CA+9djhWxLkHmg7sQFDfb4Pd5JIDngLdg=="&dn=Disability+Access](https://www.marincounty.org/Global/Contact-Us-Form?id=)) at least six days in advance of the event. Copies of documents are available in alternative formats upon request.

Website Accessibility (<https://www.marincounty.org/main/accessibility>) | Adjust Text Size (<https://www.marinhhs.org/node/467>)

Download Adobe Acrobat PDF Document Viewer (<http://get.adobe.com/reader/otherversions/>)

Notice of Nondiscrimination and Accessibility Rights (<https://www.marinhhs.org/node/2237>) (<https://www.marincounty.org/>)

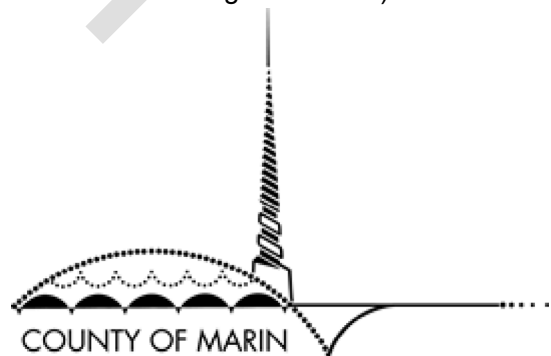

NOTICE

In accord with the Marin County Shelter in Place Order dated April 29, 2020 (effective May 4, 2020)

All workers and visitors to this job site must do the following:

1. Do not touch your face with unwashed hands or with gloves.
2. Frequently wash your hands with soap and water for at least 20 seconds or use hand sanitizer with at least 60% alcohol.
3. Clean and disinfect frequently touched objects and surfaces such as work stations, keyboards, telephones, handrails, machines, shared tools, elevator control buttons, and doorknobs.
4. Cover your mouth and nose when coughing or sneezing, or cough or sneeze into the crook of your arm at your elbow/sleeve.
5. Do not enter the jobsite if you have a fever, cough, or other COVID-19 symptoms. If you feel sick, or have been exposed to anyone who is sick, stay at home.
6. Constantly observe your work distances in relation to other staff. Maintain the recommended minimum six feet at all times when not wearing the necessary PPE for working in close proximity to another person.
7. Do not carpool to and from the jobsite with anyone except members of your own household unit, or as necessary for workers who have no alternative means of transportation.
8. Do not share phones or PPE.

