
GENERAL NOTES

- 1. ALL IMPROVEMENTS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THESE PLANS, THE STATE OF CALIFORNIA STANDARD SPECIFICATIONS DATED 2010, STANDARD PLANS DATED 2010, AND THE PROJECT SPECIAL PROVISIONS. EXACT FIELD LOCATIONS FOR NEW IMPROVEMENTS SHALL BE APPROVED BY THE ENGINEER BEFORE CONSTRUCTION.
- 2. NEW CONDUIT MAY BE INSTALLED BY DIRECTIONAL BORE OR TRENCHING IN PAVEMENT METHODS. IF TRENCHING IN PAVEMENT METHOD IS USED CONDUIT SHALL BE INSTALLED ACCORDING TO THE TRENCHING IN PAVEMENT DETAILS ON SHEET 5. SEE ELECTRICAL SCHEMATIC AND CONDUCTOR SCHEDULE ON THIS SHEET FOR CONDUIT SIZES AND CONDUCTOR COUNTS.
- 2. NOT ALL EXISTING UNDERGROUND UTILITIES ARE SHOWN ON THESE PLANS. UTILITIES THAT ARE SHOWN ON THESE PLANS ARE FOR REFERENCE ONLY. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT AT LEAST 48 HOURS IN ADVANCE OF THE START OF CONSTRUCTION. CONTRACTOR SHALL POT HOLE ALL UTILITY CONFLICTS.
- 3. CONTRACTOR SHALL PERFORM INSULATION RESISTANCE TEST ("MEGGER" TEST) ON EXISTING STREET LIGHT CONDUCTORS IN EACH POLE AND REPLACE CONDUCTORS THAT FAIL THE TEST. SEE TECHNICAL SPECIFICATIONS FOR MORE DETAILS.
- 4. CONTRACTOR SHALL INSTALL CITY FURNISHED STREET LIGHT FIXTURES AT EACH POLE. TOTAL OF 21 FIXTURES TO INSTALL.
- 5. CONTRACTOR SHALL INSTALL DUPLEX GFCI RECEPTACLES WITH METAL WEATHERPROOF IN—USE COVER NEAR THE TOP OF THE POLE WHERE INDICATED ON THE PLANS. TOTAL OF 11 RECEPTACLES TO INSTALL. SEE THE WEATHERPROOF RECEPTACLE ON STREET LIGHT POLE DETAIL ON SHEET 5.

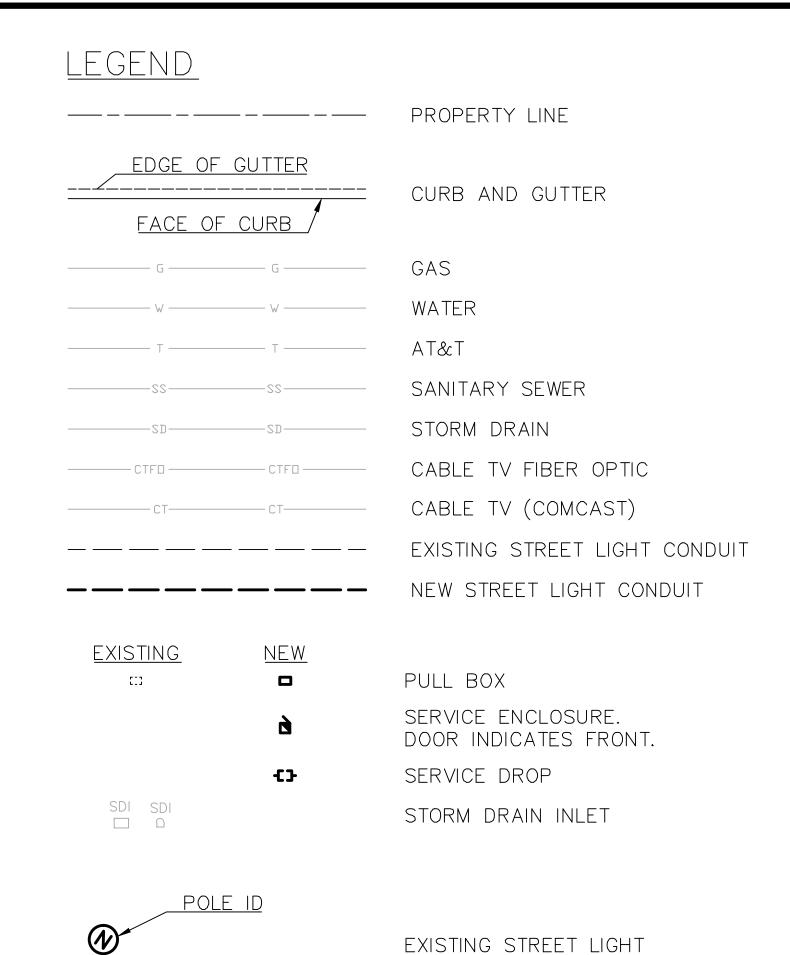

CONSTRUCTION NOTES

REMOVE AND DISPOSE OF EXISTING PULL BOX. CUT EXISTING CONDUIT TO REMOVE ENDS FROM PULL BOX. INSTALL NEW PULL BOX.

CITY OF SAUSALITO
DEPARTMENT of PUBLIC WORKS

Road and City Mobility 3765 Yale Way Fremont, CA 94538 Tel: +1 (510) 440-8127

2	ONE TRENCH/ADD UTILITES	MTK	7/10/13
	PROJECT SCOPE REVISION	MTK	5/25/13
REV	DESCRIPTION OF REVISION	BY	DATE

STANDARD WITH NEW


LUMINAIRE

CIRCUIT ID

NEW GFCI OUTLET (IF NEEDED)

NOTES AND LEGEND

BRIDGEWAY AND CALEDONIA STREET SERIES CIRCUIT CONVERSION





0328	DESIGN MTK	SCALE	NA	_DATE _	7/10/13	SH
	DRAWN <u>MTK</u>					2
	CHECKED <u>SMF</u>	APPROVED				
					REVISION	